

Freestanding Full-Function Island Drive-Up ATM

The Monimax 7600i is an advanced multi-functional free-standing island, drive-up ATM designed to provide maximum reliability, security, and convenience.

Proven deposit automation technology is provided from in-house designed and manufactured envelope-free deposit modules.

The Monimax 7600i provides continual deposit and cash service to customers with industry-leading uptime rates.

Easy to deploy, highly scalable

The Monimax 7600i's footprint allows easy installation into virtually any existing location.

Enhanced Security

The 7600i is equipped with dual UL level 1 safes for the depository and cash dispensing unit. Advanced security features include heat and vibration sensors, security alarms, and anti-skimming devices.



EXPERIENCE THE
POWER OF CHOICE



System Control

- Microsoft® Windows XP® platform
- Intel® Pentium®-IV processor or higher
- NDC+, DDC912, User Application

Customer Display

- 15" color TFT LCD
- Optional
- Privacy filter
- Sunlight readable

Communication

- TCP/IP (SSL configurable)
- Optional
- Dial up, Wireless. X.25

Input Type

- PCI EPP (Encrypting PIN pad)
- Function keys
- ADA compliant
- Optional
- Touch screen
- Tilting screen

Supervisor Operation

- TFT color LCD, touch screen

Card Handling

- Dip-type card reader
- Optional
- IC card reader EMV Level 1, 2 compliant
- Anti-skimming
- Motor-driven card reader

Cash Dispensing

- 3,000-notes cassette, up to four cassettes
- Bundle retraction
- Automatic shutter

Depository

- Envelope depository
- Optional
- Bundle check scanner and acceptor
- Bundle note acceptor

Printers

- 3.1" graphical thermal receipt printer
- 5,000 transaction receipt printer
- Electronic journal
- Optional
- Journal printer
- Statement printer

Security

- UL291 Level 1 safe
- Electronic safe lock
- Optional
- KABA Mas Cencon safe lock
- security camera
- seismic and heat sensors and alarm

Miscellaneous

- Lead-through indicator
- Illuminated signage
- Rear-view mirror
- Optional
- Extreme-weather heater, A/C

Power Supply


- AC 110–240V, 50–60 Hz
- Back-up battery

Operating Environment

- Temperature: -31°F–122°F (-35 °C–50 °C)
- Humidity: 5%–85%
(with climate control device)

Dimension and Weight

- Height: 56.7" (1,439 mm)
- Width: 41.3" (1,048 mm)
- Depth: 36" (914.4 mm)
- Weight: 2,182 lbs (990 kg) w/ env. deposit
(Preliminary specifications, subject to change)

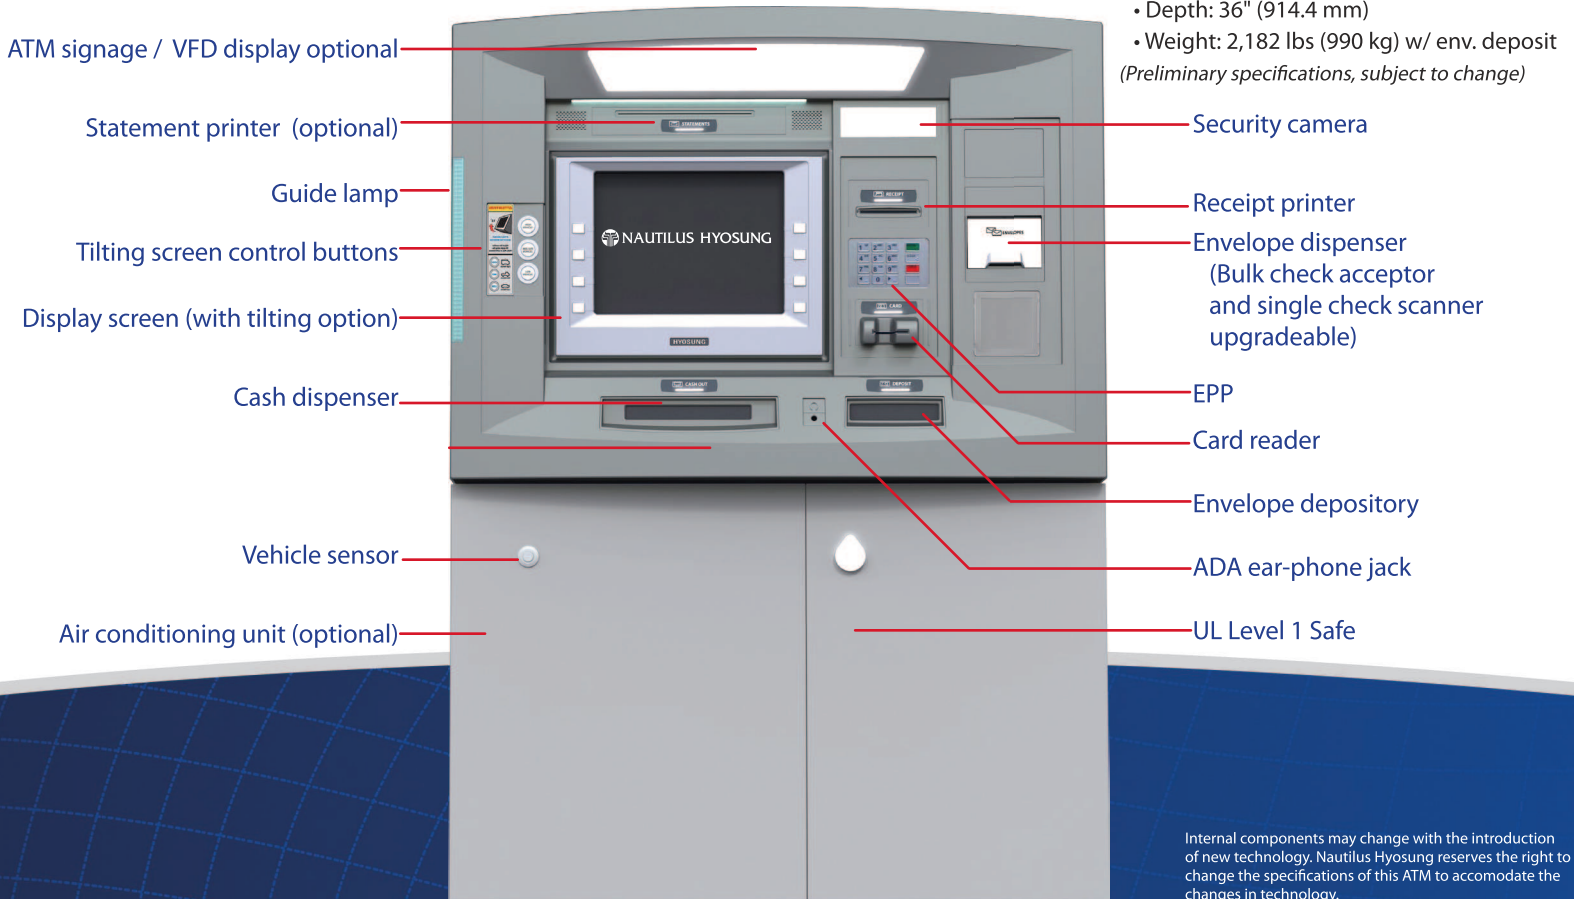

Internal components may change with the introduction of new technology. Nautilus Hyosung reserves the right to change the specifications of this ATM to accommodate the changes in technology.