

Freestanding Full-Function Island Drive-Up ATM

The Monimax 7600i is an advanced multi-functional free-standing island, drive-up ATM designed to provide maximum reliability, security, and convenience.

Features

An industry-first **automatic tilting screen** ensures maximum ATM banking convenience for your customers to suit various vehicle heights.

Proven deposit automation technology is provided from in-house designed and manufactured envelope-free deposit modules.

Easy to deploy, highly reliable

The Monimax 7600i's footprint allows easy installation into virtually any existing location.

The Monimax 7600i provides continual deposit and cash service to customers with industry-leading uptime rates.

Enhanced Security

The 7600i is equipped with dual UL level 1 safes for the depository and cash dispensing unit. Advanced security features include heat and vibration sensors, security alarms, and anti-skimming devices.



Automatic tilting screen

Customers can adjust the tilting touch screen to their vehicle height. The screen angles upward to accommodate higher vehicles and SUVs.

System Control

- Microsoft® Windows XP® platform
- Intel® processor
- NDC+, User Application

Customer Display

- 15" color TFT LCD
- Sunlight readable touch screen

Optional

- Privacy filter

Communication

- TCP/IP
- Optional**
- Wireless. X.25 capable

Input Type

- PCI EPP (Encrypting PIN pad)
- ADA compliant

Optional

- Tilting screen

Supervisor Operation

- TFT color LCD, touch screen

Card Handling

- Dip-type card reader

Optional

- Anti-skimming

Cash Dispensing

- 3,000-notes cassette, up to four cassettes
- Bundle retraction
- Automatic shutter

Depository Options

- Envelope depository
- Bulk check acceptor
- Bulk note acceptor

Printers

- 3.1" graphical thermal receipt printer
- 5,000 transaction receipt printer
- Electronic journal

Security

- UL291 Level 1 safe
- Enhanced Alarms
- Electronic safe lock

Optional

- KABA Mas Cencon safe lock
- security camera

Miscellaneous

- Lead-through indicator
- Illuminated signage
- Rear-view mirror

Optional

- Extreme-weather heater

Power Supply


- AC 110–240V, 50–60 Hz
- Back-up battery

Operating Environment

- Temperature: -31°F–122°F (-35 °C–50 °C)
- Humidity: 5%–85%
(with climate control device)

Dimension and Weight

- Height: 56.7" (1,439 mm)
- Width: 41.3" (1,048 mm)
- Depth: 36" (914.4 mm)
- Weight: 2,182 lbs (990 kg) w/ env. deposit
(Preliminary specifications, subject to change)

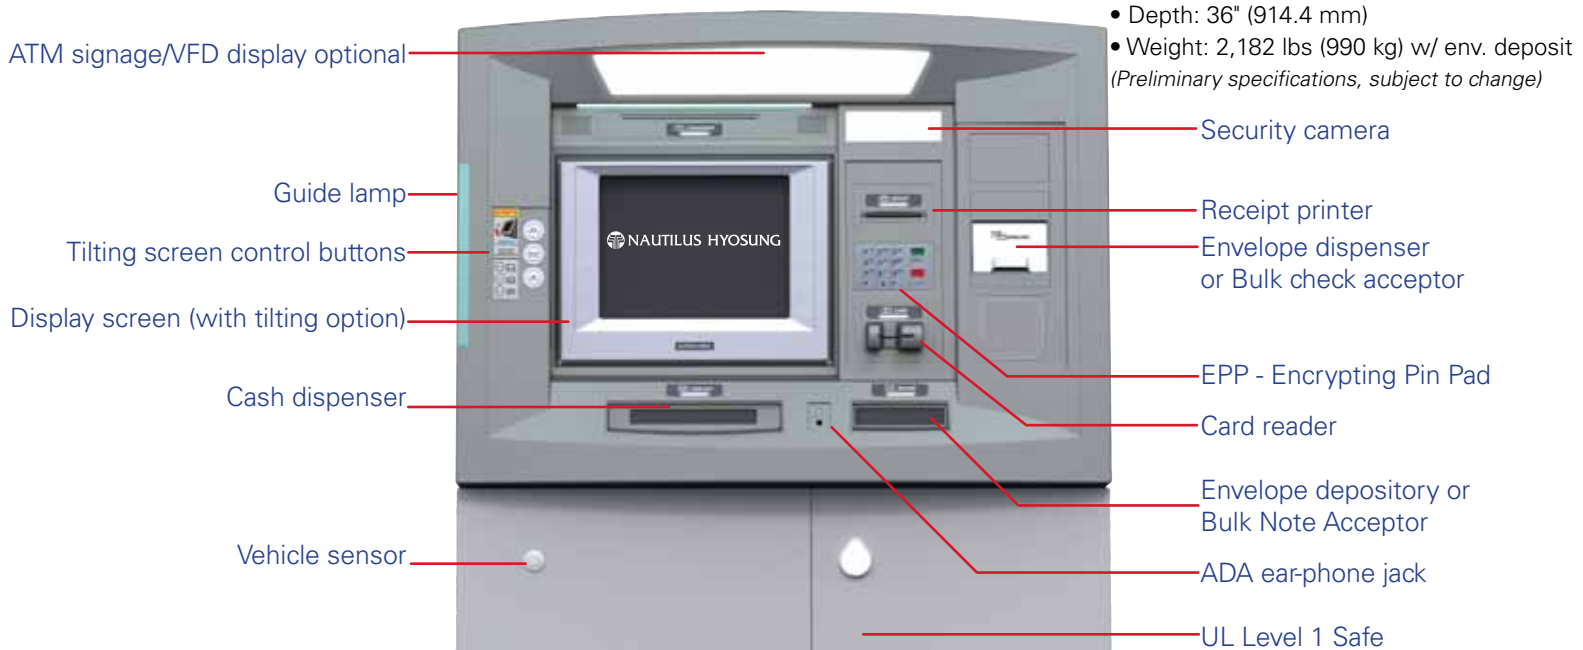

NH 7600i
001_06/2011

Datruie Process Automation
2705 Twin City Drive
Mandan, ND 58554

701-663-8930 | FAX 701-663-2308
www.datruie.com | info@datruie.com



Internal components may change with the introduction of new technology. Nautilus Hyosung reserves the right to change the specifications of this ATM to accommodate the changes in technology.